


Section 2

WILDEN PUMP DESIGNATION SYSTEM

T1 ORIGINAL™ METAL

**13 mm (1/2") Pump
Maximum Flow Rate:
54.9 lpm (14.5 gpm)**

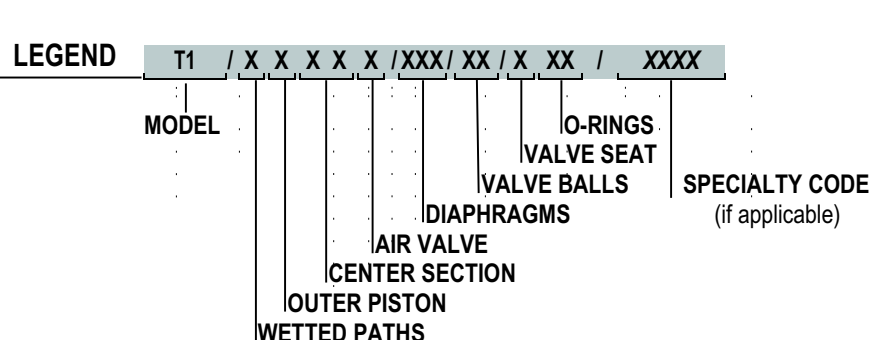

MATERIAL CODES

MODEL T1 = 13 MM (1/2")	DIAPHRAGMS BNS = BUNA-N (Red Dot) FSS = SANIFLEX™ [Hytre!® (Cream)] PUS = POLYURETHANE (Clear) THU = PTFE W/HIGH-TEMP BUNA-N BACK-UP (White) TNL = PTFE W/NEOPRENE BACK-UP O-RING, IPD (White) TNU = PTFE W/NEOPRENE BACK-UP (White) TSU = PTFE W/SANIFLEX™ BACK-UP (White) VTS = FKM® (White Dot) WFS = WIL-FLEX™ [Santoprene® (Orange Dot)] XBS = CONDUCTIVE BUNA-N (Two Red Dots)	VALVE BALLS BN = BUNA-N (Red Dot) FS = SANIFLEX™ [Hytre!® (Cream)] PU = POLYURETHANE (Brown) TF = PTFE (White) VT = FKM (White Dot) WF = WIL-FLEX™ [Santoprene® (Orange Dot)]
WETTED PATH A = ALUMINUM		VALVE SEATS A = ALUMINUM H = ALLOY C S = STAINLESS STEEL VT = FKM® (White Dot)
OUTER PISTON A = ALUMINUM Z = NO PISTON		VALVE SEATS O-RINGS BN = BUNA-N FS = SANIFLEX™ [Hytre!® (Cream)] PU = POLYURETHANE (Brown) TF = PTFE WF = WIL-FLEX™ [Santoprene®]
AIR VALVE B = BRASS		

SPECIALTY CODES

0014 BSPT

NOTE: Most elastomeric materials use colored dots for identification.

NOTE: Not all models are available with all material options.

FKM is a registered trademarks of DuPont Dow Elastomers.

Santoprene® is a registered trademark of Monsanto Company, licensed to Advanced Elastomer Systems, L.P.

Hytrel® is a registered trademark of DuPont Dow Elastomers.